




^HEADERTYPE01=^index.html^Sky Shark Arcade Manual
 ^Flying Shark^index.html^../index.html^../music/toaplan_cdlist.html#tigerheli^

ROMSTAR™ INC.

SKY SHARK™

Instruction Manual

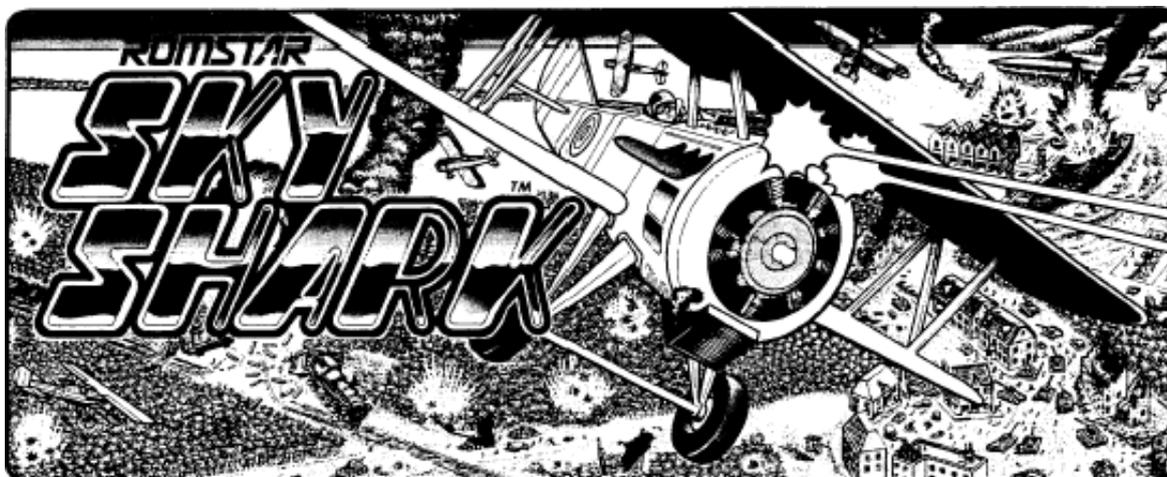

Romstar, Inc.
 3043 Kashiwa Street, Torrance, CA 90505
 Phone (213) 539-2744 Fax (213) 539-3626 Telex 182426

Installing and Servicing Your

SKY SHARK™

New Game Package

Table Of Contents

New Game Package Contents	2
Power and Monitor Requirements	2
Recommended Tools and Supplies	3
Dip Switch Tables	3&4
Game Operation	5
Installation Procedures	6
Control Panel Positioning	11
TECH TIPS	12 - 13
Main Harness Connections	outside back cover

NEW GAME PACKAGE CONTENTS

1 Main Printed Circuit Board	1 Marquee
1 Monitor Bezel	1 Control Panel Overlay
1 Set Legs, Bolts & Spacers	1 Plex Control Cover
1 Connecting Wire Harness	1 Set Side Graphics
1 Eight-Way Joystick	1 Set Play Instructions & Function Labels
6 Player Button Assemblies	1 Service and Installation Manual

Note: Replacement accessories available through your exclusive Romstar distributor

POWER REQUIREMENTS		MONITOR REQUIREMENTS
+ 5 VDC	7 am minimum	Verticle Mount Raster Scan
+12 VDC	1 amp minimum	Negative Composite Sync

Before You Get Started...Stop!

1. Does your new game package include all listed parts? (Is it complete?)
2. Is the game you have chosen to transform able to supply all the required voltages for the new game? Note: Some games (i.e. Ms. Pac Man, Galaxian, etc.) regulate their voltages on the main PCB. This makes the existing power supply inefficient. These game will require a change in power supply for your new game. Many game supply houses can offer you a switching regulated power supply for a relatively low cost.
3. Is the monitor configuration compatible? In most games it is rather difficult to change the monitor from a vertical mount to a horizontal mount. We recommend you choose a game cabinet with the same mount as your new game requires.

4. Do you have the necessary tools? (See the recommended tools list)

Caution

F.C.C. Regulation Compliance

Operation of this equipment in a residential is likely to cause interference - in which case, the user at his own expense, will be required to take whatever measures may be required to correct the interference.

Recommended Tools and Supplies

ROMSTAR new game package	Painting Supplies (If you do your own painting)
Phillips and Slot Screwdrivers	Paint Brush and Paint (don't forget the primer)
Socket Set	Paint roller and Pan
Enthusiastic Attitude	Sand Paper
Wire Cutters and Strippers	Putty Knife and Wood Putty
Pliers or Channel Locks	A Good Night's Sleep
Planning and Careful Thought	Staple Gun and Staples
Electric Drill	Soldering Iron and 60/40 Resin Core Solder
3/32" * 1/4" * 7/16" Drill Bits	Vacuum Cleaner
1/4" Plex Bit	Assorted Fastening Hardware
1-3/16" Chassis or Sheet Metal Punch	Shrink Tubing: 3/32" * 1/8" * 3/16"
1 1/4" Plex Hole Saw	Masking Tape
Glass of Water and a Snack	3 1/2" OR 4" Wire Ties
Small File	Spray Window Cleaner and Rags (baby diapers work GREAT!)
Razor Knife and Sharp Blades	
Straight Edge	
Patience	
Common Sense	

Dip Switch Tables

Optimize Your Profits

Thorough Research shows that two and a half minute games both satisfy players and also keep the quarters flowing.

If games aren't running about two and a half minutes long then collections probably aren't at their peak. You'll want to tailor your game to your location. The trick is to adjust a few DIP switches (See the chart in this book.) It's easy!

Dip Switch 1 Sky Shark Dip Switch Settings

	Item	1	2	3	4	5	6	7	8
Game Style	Table	Off							

	Upright	On							
Monitor	Normal		Off						
	Flip		On						
Test	Normal Game			Off					
	Test Mode			On					
Attract Sound	On				Off				
	Off				On				
Coin 1	1-Coin 1-Play					Off	Off		
	1 / 2					On	Off		
	2 / 1					Off	On		
	2 / 3					On	On		
Coin 2	1-Coin 2-Play							Off	Off
								On	Off
								Off	On
								On	On

Dip Switch 2

	Item	1	2	3	4	5	6	7	8
Difficulty	A	On	Off						
	B	Off	Off						
	C	Off	On						
	D	On	On						
Bonus Level	50,000 - 150,000			Off	Off				
	70,000 - 200,000			On	Off				
Number of Planes	50,000 Only			Off	On				
	100,000 Only			Off	On				
	3					Off	Off		
	5					On	Off		
Dip Switch Test	Normal							Off	
	Test							On	
Continue Play	Off								Off
	On								On

Game Operation



1000 BONUS POINTS AWARDED FOR DESTROYING ENTIRE YELLOW FIGHTER SQUADRON



WHEN ENTIRE RED SQUADRON DESTROYED,

-  - APPEARS, INCREASES FIREPOWER WHEN PICKED UP
-  WHEN ENTIRE BLUE SQUADRON DESTROYED,
-  - APPEARS, EXTRA PLANE AWARDED WHEN PICKED UP
-  1 EXTRA BOMB AWARDED FOR EACH PICKED UP

Installation Procedures

Something to think about

Your final product will be a **new game**.

You have made a wise decision to transform a game that has seen better days in the all important cash box into a **new game**. This is by far the most cost effective alternative to maximize the return of your initial investment. All you provide is the cabinet with a power supply and a monitor. Oh yes, you will need a touch of elbow grease. And that's it! We provide the rest. The end result is ... a **new game** at a very low cost.

Fact: Spend a little time on the cabinet's appearance (i.e. marquee, control panel and cabinet graphics). With a little paint, some wood putty and new lights, you will raise the profits of any game...especially with the introduction of a new game package.

The **new game** look should always apply to the inside of your game as well as the outside. A few wire ties and shrink tubing on your harness; some fastening hardware on your subassemblies and a sweep with the ol' vacuum cleaner will ensure that unnecessary glitches do not occur.

Remember: You are creating a new game.

If you have any questions or just need some advice on any of your **new game** transformations, don't hesitate in giving a member of our technical staff a call.

Let's Get Our Hands Dirty

Preparing the Original Game for the New Game

Remove the following:

1. Main Logic Boards
2. Control Panel
3. Monitor Plexiglass
4. Monitor Bezel
5. Marquee
6. Graphics

I would recommend painting your cabinet to give it a fresh new look. You may consider having an auto body shop take care of your painting needs.

If your cabinet has wood grain sides; remove old graphics and adhesive (adhesive may be removed with lacquer thinner.)

If you intend to use your original plexiglass, be sure it is in mint condition or it should be replaced.

Thoroughly clean out your cabinet.

Time To Install Your New Goodies

Before You Start...Remember DO NOT Do This Work With The Power On!

Logic PCB Cage

Mount the logic board securely (away from power supply).

- A. Mark and drill pilot holes (3.32").
- B. Install the PCB into cabinet. Use feet and spacers supplied and adjust them so that the screws will go through the holes in the cabinet.

Wire Harness

Attach the wire harness connector to the main logic board. **CAUTION:** Sometimes the connector is not keyed and it is very easy to install it reversed on the logic board. Even if it is keyed, always **triple check** to be sure the wire inputs were connected correctly to the connector and the connector to the logic board.

Connecting the Wire Harness to the Existing Wires

When you hook up the control panel, power supply, monitor or other subassemblies that remain in the game cabinet to your new wire harness, try and use their existing secondary connectors.

1. Cut the original wire approximately three inches from the original connector. Strip off about one half inch of insulation.
2. Solder the new wire designated for that position to the original wire you just stripped. Warning: DO NOT JUST TIE THE WIRES TOGETHER. THIS CAN CAUSE NAGGING INTERMITTENT PROBLEMS THROUGHOUT LOOSE CONNECTIONS OR OXIDATION OR BOTH. **Always take the time to do it right.**
3. Melt shrink tubing around all your in-line wire connections. Do not use electrical tape. Tape could unravel over a period of time due to the cabinet heat and cause you a great deal of trouble.
4. Use wire tie wraps, and secure the cable to the cabinet whenever it seems necessary. Remember this is a **new game**, not a sloppy conversion.

Power Wires

1. Connect the wires that are designated for your power supply. You will need a supply of

+5V, +12V & ground. Your **new game** package may not require all of the voltages that were used in the original game. Tie off any unused wires.

2. You will notice that you probably have more than one wire for each voltage. It is a good idea to use all wires supplied (double up if it is necessary). This will help to ensure that you don't overload the edge connector pins and cause them to "burn".

Monitor Wires

You will be connecting the wires designated for the RED, GREEN & BLUE video guns along with the SYNC & GROUND wires.

NOTE...CONCERNING SYNC

Your **new game** only calls for one sync wire connections, this is called **composite sync** (horizontal and vertical tied together). This composite sync is also **negative**. Most monitors have supply positions for both negative and positive sync. You can check your monitor manual or call our technical department for assistance.

Speaker Wires

Find the two wires that are designated for the speaker and hook 'em up.

Coin Door Wires

1. Connect the designated wires to the coin switches and meter. (See tech tips)
2. You can connect your door lamps to the unused -5V power supply. Some games have separate power outputs for coin door lamps.
3. Be sure to clean and lubricate your old coin mechanisms. Keep the money coming in.

GUESS WHAT?

You are almost done with the electrical connections of your **new game**. All you have left is the control panel wiring. But we are going to hold off on that for right now. We have a few other things we need to do first. SO why don't you go ahead and get yourself a drink of water and stretch your legs. When you return, we can take a fresh look at your progress and then move forward.

Smoke Test

What test?

Don't worry. All this means is that your are ready to apply power to the system for the first time and pray that there will be no smoke from a simple oversight.

You are just about ready to power up the logic board. But first we need to recheck your work.

1. Carefully inspect the game for loose power wires, exposed connections and extra fastening hardware.
2. Make sure the logic board, monitor and power supply are securely fastened in place.
3. Double Check the connectors to be sure they are wired and connected properly.
4. Set the dip switches on the logic board to the factory recommendations. (Refer to page 5.) Also, be sure you set the dip switches for "DEMO WITH SOUND". This will enable you to hear as well as see that your new PCB is functional.

Time to apply Power:

1. Look and smell for smoke (TURN OFF IMMEDIATELY IF ANY IS NOTICED)
2. Listen for game sounds.
If after one minute you have not heard any sounds:
 - A) Check for proper dip switch settings.
 - B) Adjust volume control and check speaker connections
 - C) Check the +12V power supply to the logic board.

NOTE: If you don get sounds, but they are a little fuzzy, switch the wires around on the speaker.
3. How is the monitor image?
 - A) **Is the picture out of sync?**
If your picture has the top and bottom halves of the screen reversed and it will not stop rolling, change your sync polarity on the monitor. (Positive to negative, see tech tips section).

NOTES:

B) Now how's your picture?

- * Is it centered?
- * Is it too bright or dim?

* Is it in focus?

Check your monitor manual for these adjustments. If your screen looks "off" then your **new game** transformation may have been in vain. So let's take the time to make the monitor look great.

C) **Is the picture upside-down?**

Refer to your monitor manual - switch two horizontal yoke wires and the switch two vertical wires. (Pull the pins in the connector on the monitor PCB to switch them.) or check Dip Switch Tables.

Control Panel Assembly

1. Remove the buttons, joysticks and wire harness and put them aside for now. Do not remove the original panel overlay until the new holes have been drilled.
2. Mark positions on the panel for the new holes.
ROMSTAR supplies a clear 1/8" thick piece of plexiglass with every **new game** package to cover the control panel. We feel that your new game investment is well worth protecting...and the control panel is the first place to show wear and tear.
 * You will need to cut this piece to size. Use the control panel as a template.
 * Use a razor knife to score the plexiglass **deeply**. The use a pair of pliers to break away the extra plexiglass.
3. Now drill the holes in you panel that you have marked off for teh buttons, joystick and bolts. **Hint:** For best results, use a chassis or sheet metal punch for button holes.
4. Drill the same holes on your plexiglass panel protector. Once again use your panel as a template. **Hint:** To avoid chipping while you are drilling the holes, place the plexiglass securely on a soft wood surface and use a plexiglass drill bit and hole cutter.
5. The holes are now all cut. Smooth them out on your pan and plexilass with a fine toothed file.
6. Remove the original graphics overlay from the panel. Clean up the panel and install your **ROMSTAR** graphics.
Make It Easier: Peel the top half of the protective backing off of your graphics. Start from the center and smooth out your overlay. Make sure you have about an inch extra coming off the top. No bubbles please. Now peel off the bottom half and do the same as you did for the top.
7. Adhere the instruction and function labels.
8. Install the Plex Control Cover over your completed **new game** panel. **Note:** Be sure to bold the plexiglass securely to the panel.
9. Mount the joystick and the buttons to the panel and wire them up. (Use the existing Panel wiring if possible)

Marquee Installation

Using the original marquee as a template, Center your new game marquee graphics and score the new marquee deeply to fit the cabinet. Break off the excess with pliers.

Note: when cutting marquee to size, check to make sure that you are cutting as little as necessary art as possible (name, manufacturer, etc.)

Be sure the light behind the marquee works. Everything should **always work** on a new game.

Take your time ... Don't forget this is going to be a **new game**.


Side graphics Installation

1. Be sure sides of game are clean and free of old adhesive, dust, etc.
2. Mark position of decal with erasable pen or pencil (centered on upper half of cabinet).
3. Peel off top 1/4 of decal backing and apply to cabinet with a smoothing motion (use a soft rag). Continue peeling off backing and smoothing.
4. Remove any small bubbles with a pin or razor blade (pop them!)

Finishing Touches

1. Check the game inside and out for any imperfections. Secure any loose wiring or fastening hardware.
2. Make sure the coin door is tight and the coin mechs are well adjusted. A game is no good to anybody if you can't get a coin into it.
3. Once again go over every step of this **new game** transformation in your mind. Be sure everything is correct and to your liking.
4. Power up the game.
 - A. Check all the coin switches. (Does the coin meter work?)
 - B. Play your new game.
 - * Are all the player controls working?
 - * Are the game sounds present?
 - * Is the volume level proper?
 - * Are the dip switches set properly?

Well, that's about it. Good Luck.

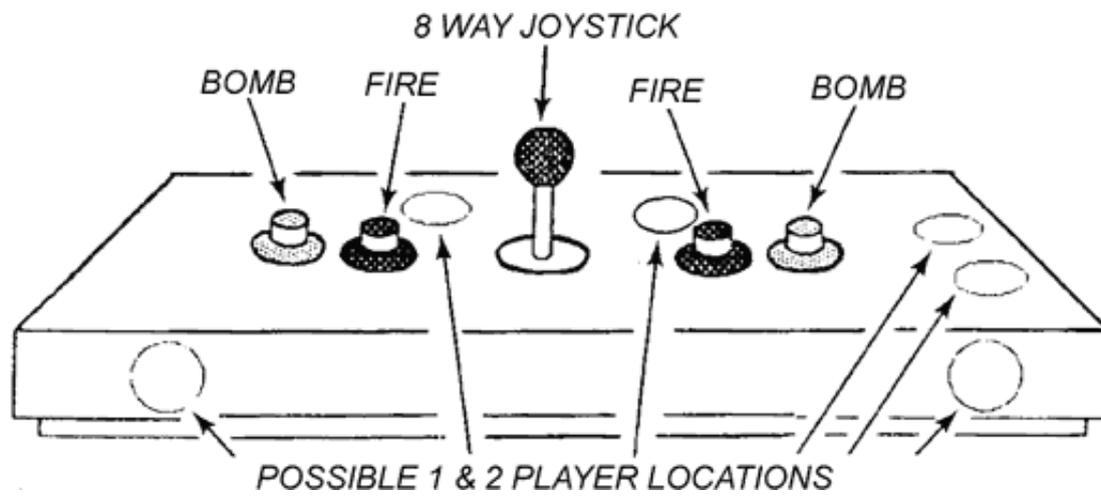

Control Panel Positions


Star Tech Tips

We are grateful to Star Tech Journal(tm) for allowing us to publish the following excerpts from their journal.

1. Monitor Sync

If your monitor does not have dual polarity positions for sync, you may use one of the following methods to get your game going.

CURE 1: Install a simple one I.C. Circuit on your logic board. This I.C. may be "piggy backed" on to another 7404 series chip for power by bending up all but the two power pins so that they are parallel to the top surface of the new I.C. and the connecting the power pins only to the existing chip. (See Fig. 1) Next connect the sync wires as shown in Fig. 2. (Note: Figure 2 shows a hookyp for either composite or separate syncs.)

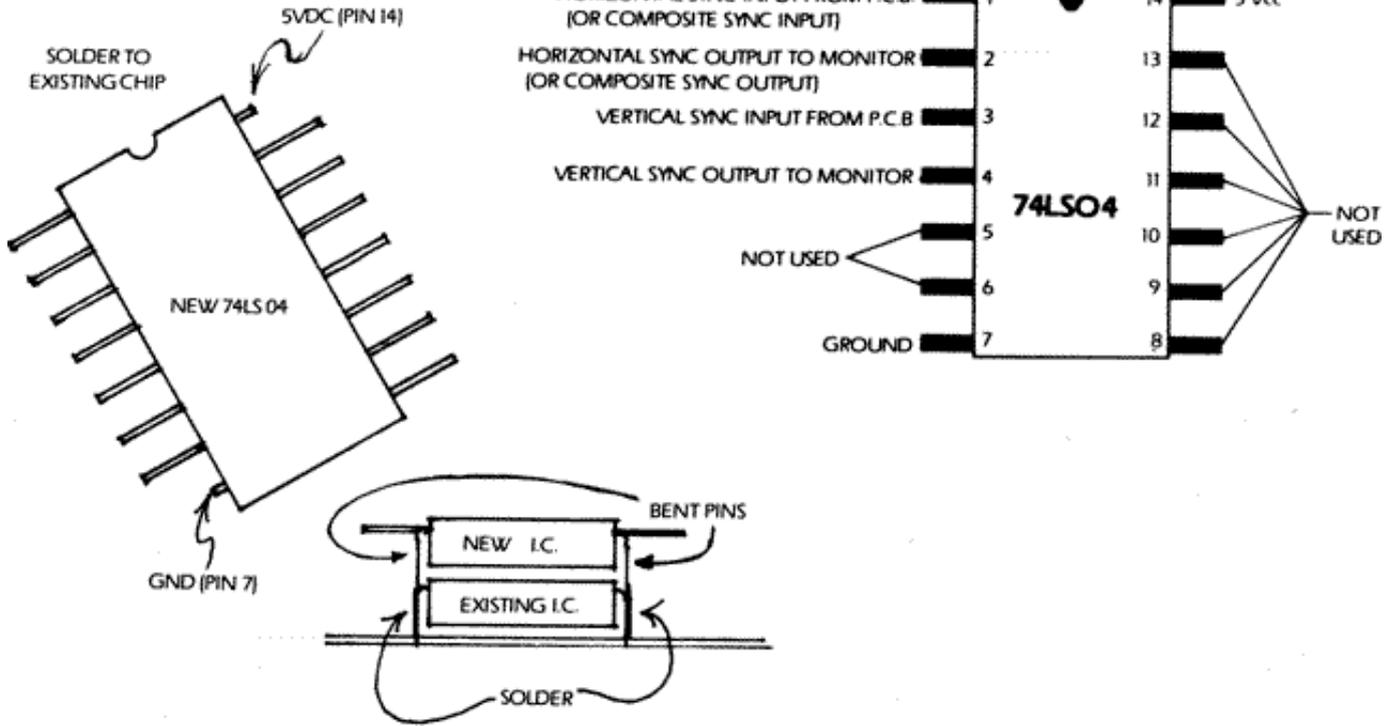


CURE2: Used for Wells-Gardner Video-Sync boards with positive sync on connections only. (Vertical mount board 85x1408).

Cut the traces on the solder side of the board between input pins 5 & 6 to the unbanded (anode) ends of diodes X201 & X202.

Add a MPSA56 transistor as follows:

Collector to anode leads of diodes X201 & X202. Base to pins 5 & 6 of the video input connector. Emitter to cathode (banded) lead of zener diode ZD201.

Insert a IN4148 diode - cathode to the emitter of the MPSA56 and anode to the base.

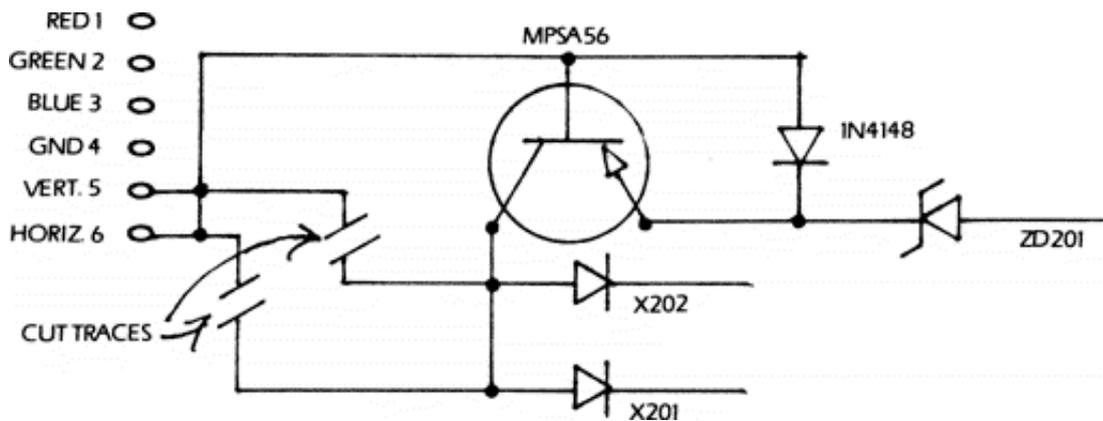


2. Horizontal Tearing

CAUSE: The negative sync signal of most logic sets are slightly different than the GO7-CBO monitor negative sync inputs. The result of this mismatch is a horizontal "wave" or "curl".

CURE 1: One the monitor deflection board, replace C303 with a 10 uf 25V radial lead capacitor with the positive lead towards the collector of X305. (CAUTION: be sure to check this step as the original cap is not polarized.) Then replace C501 with the cap removed from the C303 location.

CURE 2: Connect IN4148 fast-switching diodes across both the positive and negative sync inputs to the monitor. (See Fig. 4) NOTE: Both diodes must be installed or you will not have vertical stability.

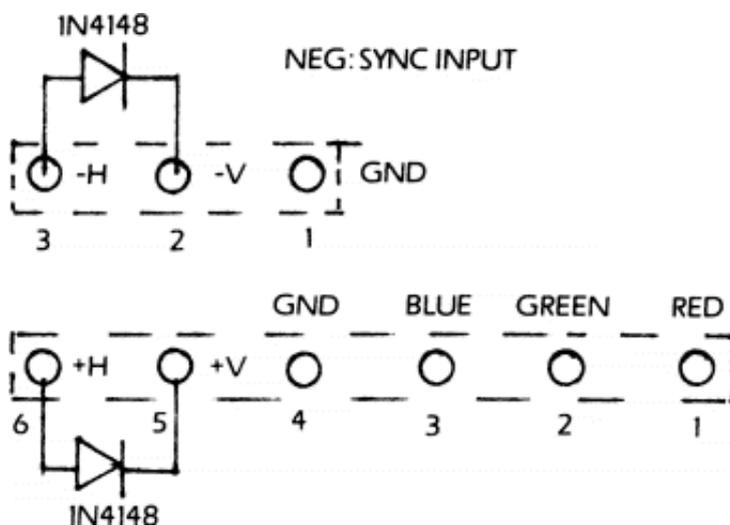

CURE 3: Join negative sync inputs J2 and J3 together with a jumper. Locate W102 and install a jumper from W102 to either J2 or J3.

CURE 3: For Wells-Gardner K4600 series monitors

Replace C356 (47uf 25V) on the Horizontal/Vertical board (vertically mounter board nearest the flyback transformer) and center the horizontal hold pot. Turn L351 for the best horizontal stability and fine-tune with the horizontal width pot.!

Typed in at toaplan.com ^EMAIL^STATS40^