

# B L A N D I A

## I N S T R U C T I O N M A N U A L

### SPECIFICATION

- ① NAME ..... B L A N D I A  
② SIZE OF PC BOARD ..... 3 1 6 (W) × 2 3 8 (D) × 2 0 (H) [mm]  
③ POWER SUPPLY OF PC BOARD --- D C + 5 V 1 . 5 A / D C + 1 2 V 1 A

(ATTENTION) Ajust voltage before turning on power.  
Measure voltage at edge connector of PC board. Thank you.

DIP SW 1

FACTORY SET


Item	Condition	1	2	3	4	5	6	7	8
3 round much		OFF	OFF						
Number of player	1	0 N	OFF						
	2	OFF	0 N						
	3	0 N	0 N						
Difficulty	Normal			OFF	OFF				
	Easy			0 N	OFF				
	Hard			OFF	0 N				
	Very hard			0 N	0 N				
Two play credit	2 Credit					OFF			
	1 Credit					0 N			
Continue mode	1 Credit						OFF		
	1 Coin						0 N		
Flip screen	Normal							OFF	
	Reverse							0 N	
Test mode	Game								OFF
	Test								0 N

DIP SW 2

Item	Condition	1	2	3	4	5	6	7	8
Demo sound	Exit	OFF							
	Non	0 N							
Coin 2 credit mode	Mode A		OFF						
	Mode B		0 N						
Coin 1	1Coin1Credit			OFF	OFF	OFF			
	1Coin2Credit			0 N	OFF	OFF			
	1Coin3Credit			OFF	0 N	OFF			
	2Coin1Credit			OFF	OFF	0 N			
	2Coin3Credit			OFF	0 N	0 N			
	2Coin5Credit			0 N	OFF	0 N			
	3Coin1Credit			0 N	0 N	OFF			
Coin 2	Type 1						OFF	OFF	OFF
	Type 2						0 N	OFF	OFF
	Type 3						OFF	0 N	OFF
	Type 4						OFF	OFF	0 N
	Type 5						OFF	0 N	0 N
	Type 6						0 N	OFF	0 N
	Type 7						0 N	0 N	OFF
	Free play	0 N	0 N	0 N	0 N	0 N	0 N	0 N	0 N

	Coin mode A	Coin mode B
Type 1	1 Coin 1 Credit	1 Coin 1 Credit
Type 2	1 Coin 2 Credit	1 Coin 2 Credit
Type 3	1 Coin 3 Credit	1 Coin 3 Credit
Type 4	2 Coin 1 Credit	2 Coin 4 Credit
Type 5	3 Coin 1 Credit	2 Coin 5 Credit
Type 6	4 Coin 1 Credit	2 Coin 6 Credit
Type 7	5 Coin 1 Credit	2 Coin 7 Credit

< PARTS SIDE >

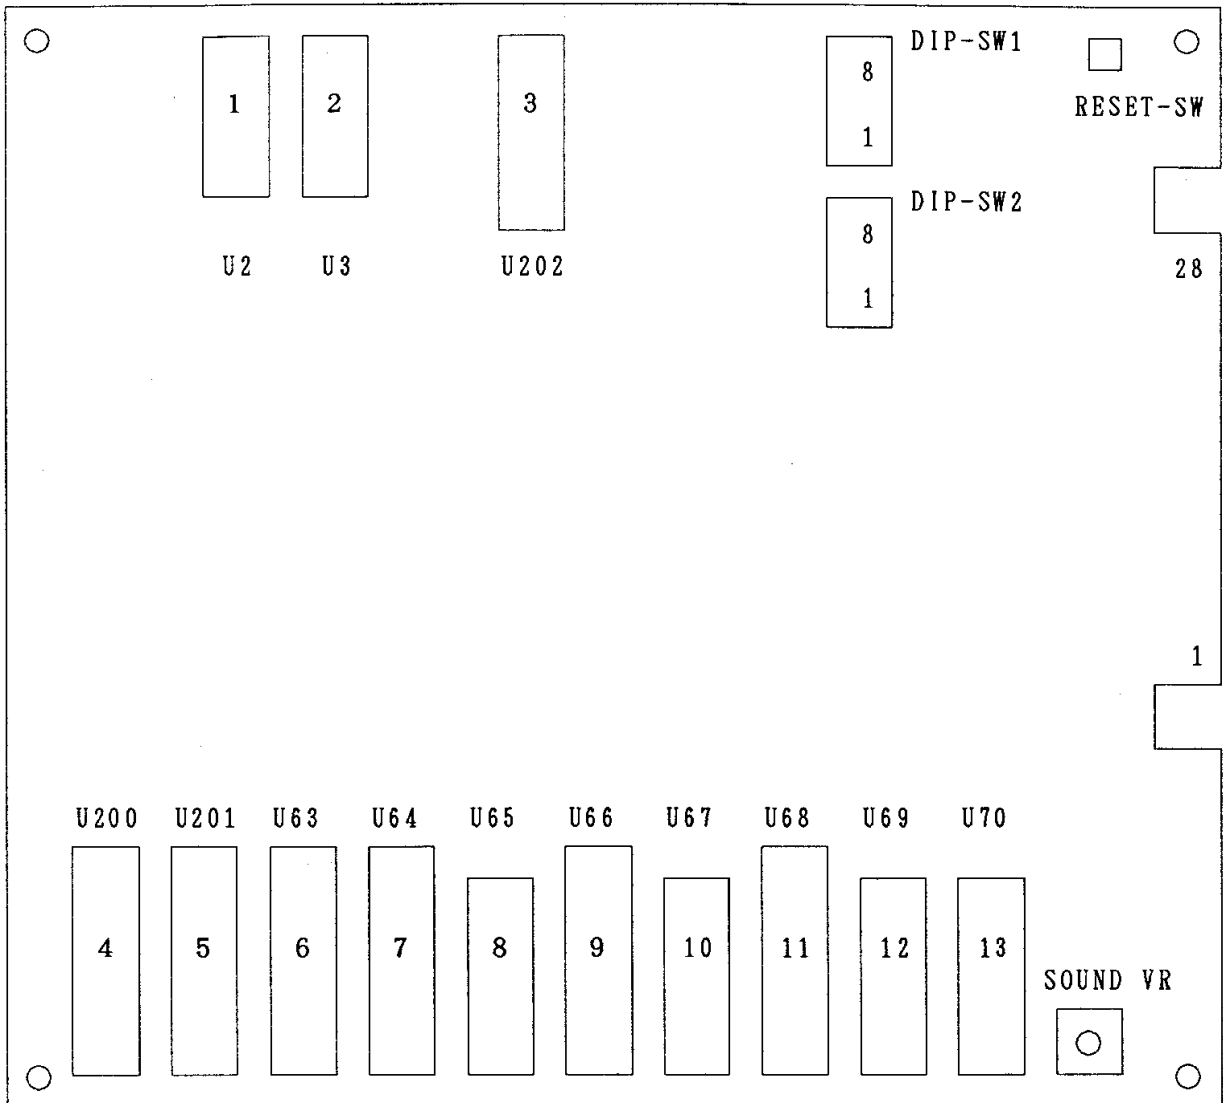

## CONNECTION PIN ASSIGNMENT

JAMMA

SOLDER SIDE	TERMINAL		PARTS SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
NC	E	5	NC
+12V	F	6	+12V
POST	H	7	POST
COIN COUNTER 2	J	8	COIN COUNTER 1
COIN LOCKOUT 2	K	9	COIN LOCKOUT 1
SPEAKER (-)	L	10	SPEAKER (+)
NC	M	11	NC
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
TILT SW	S	15	NC
COIN SW 2	T	16	COIN SW 1
START SW 2	U	17	START SW 1
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P TOP	Z	22	1P TOP
2P MIDDLE	a	23	1P MIDDLE
2P UNDER	b	24	1P UNDER
NC	c	25	NC
NC	d	26	NC
GND	e	27	GND
GND	f	28	GND